



NOTE: CONCRETE BLOCK MAY BE COVERED WITH CEMENT PLASTER IF ALTERNATE FINISH IS DESIRED.

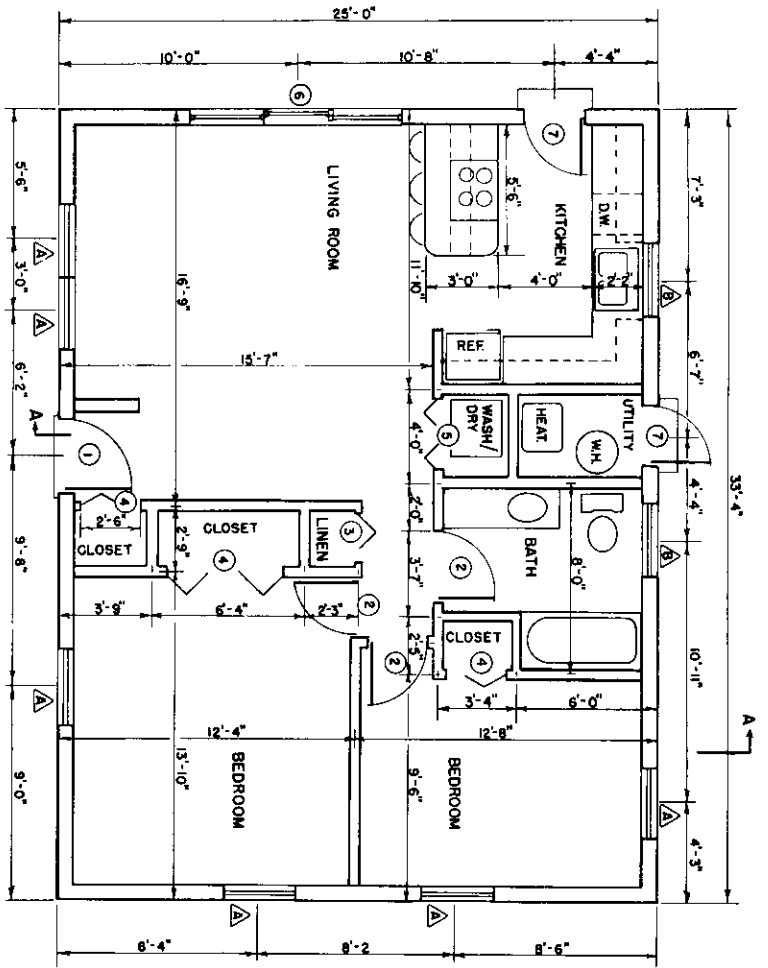


FLOOR PLAN 1/2" = 1'-0"

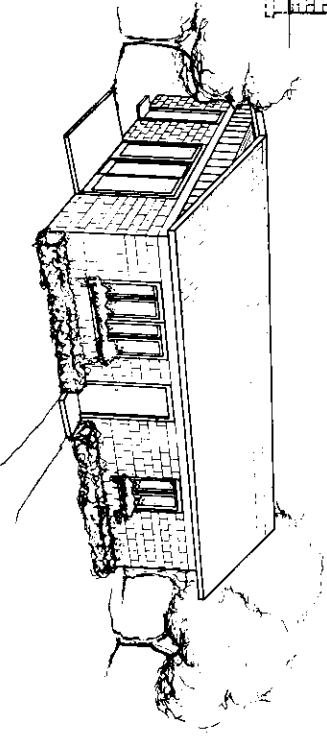

PERSPECTIVE VIEW (NOT TO SCALE)


WINDOW SCHEDULE			
SYMBOL	SIZE	DESCRIPTION	No.
A	3'-0" x 4'-4"	WOOD SLIDING WINDOWS	6
B	3'-0" x 3'-0"	WOOD SLIDING WINDOWS	2
NOTE: USE INSULATED GLASS FOR ALL WINDOWS			
DOOR SCHEDULE			
SYMBOL	SIZE	DESCRIPTION	No.
1	3'-0" x 6'-8"	WOOD SOLID CORE, EXTERIOR	1
2	2'-8" x 6'-8"	WOOD HOLLOW CORE, INTERIOR	3
3	2'-0" x 6'-8"	WOOD BIFOLD	1
4	2'-6" x 6'-8"	WOOD BIFOLD	4
5	1'-6" x 6'-8"	WOOD BIFOLD	2
6	8'-8" x 6'-8"	SLIDING GLASS, EXTERIOR	1
7	2'-6" x 6'-8"	WOOD SOLID CORE, EXTERIOR	2

COOPERATIVE EXTENSION SERVICE
 AGRICULTURE AND HOME ECONOMICS
 UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING
 AND
 MASONRY CONSTRUCTION
TWO BEDROOM HOUSE
 FLA 1972 7194 SHEET 1 OF 2
 REVISED 1985

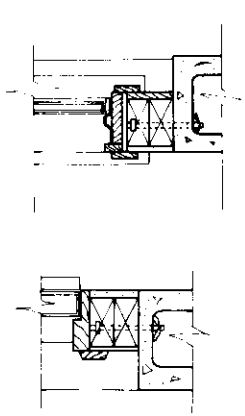


WINDOW JAMB

DOOR JAMB




SCALE

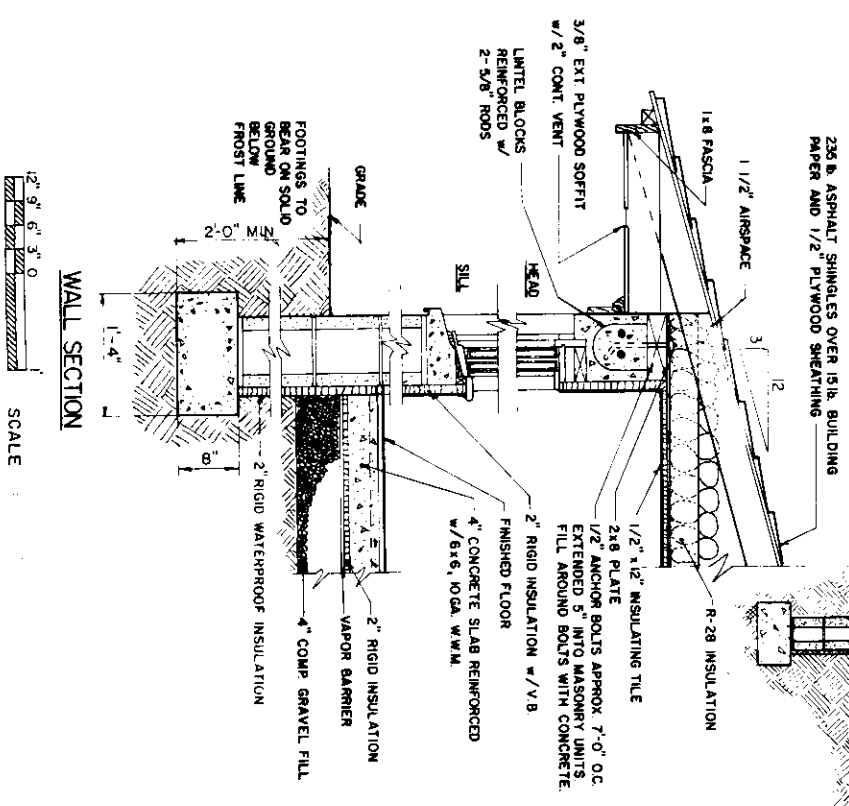

WALL SECTION

SCALE

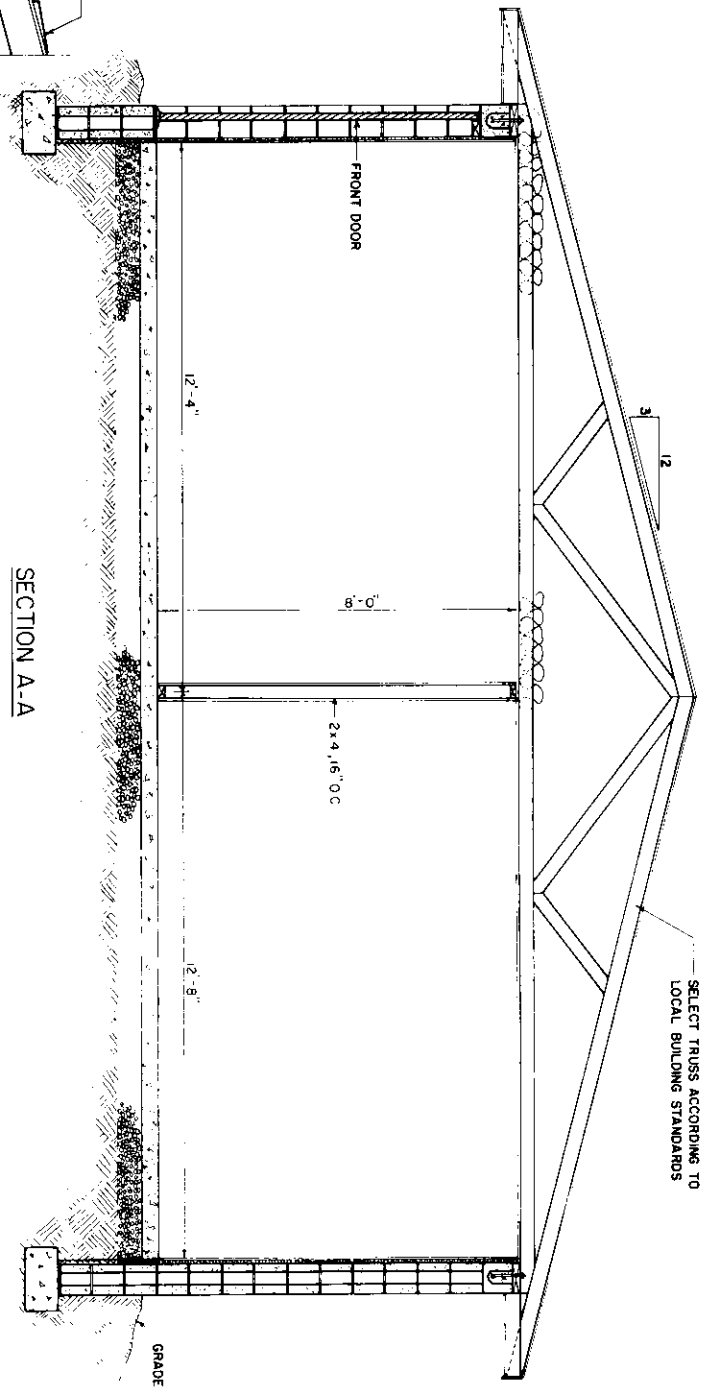

SELECT TRUSS ACCORDING TO LOCAL BUILDING STANDARDS


SECTION A-A

SCALE

HEATED AREA: 825 SQ FT

CONSTRUCTION CHECK LIST

1. CHECK LOCAL BUILDING CODE AND LOAN COMPANY CRITERIA. PURCHASE TRUSSES TO MEET LOCAL SNOW LOAD CRITERIA.
2. APPROPRIATE NAIL AND ANCHOR JOINTS.
3. USE EXTERIOR GRADED PLYWOOD WHEREVER IT MAY BE LEFTTED DURING OR AFTER CONSTRUCTION.
4. PRESSURE TREAT ALL WOOD WITH GROUND CONTACT AND PROVIDE OTHER NEEDED THERMITE CONTROL.
5. R VALUES DEPEND ON LOCAL CLIMATE AND FUEL COSTS.
6. PROVIDE 1 SQ FT OF ATTIC VENT OPENINGS PER 150 SQ FT OF CEILING.
7. WEATHERIZE ALL OPENINGS AND JOINTS.

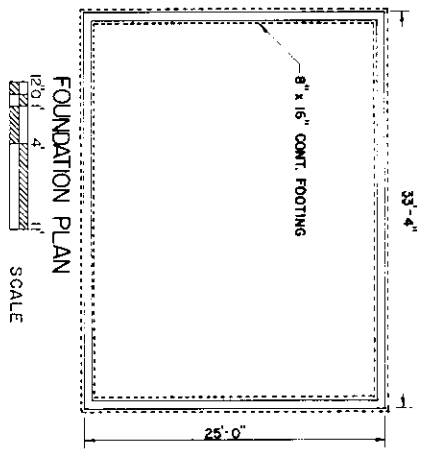

FOUNDATION PLAN

SCALE

COOPERATIVE EXTENSION SERVICE
AGRICULTURE AND HOME ECONOMICS

UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

TWO BEDROOM HOUSE
MASONRY CONSTRUCTION

FLA 1972 7194 SHEET 2 OF 2

REVISED 1985